

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

A PORTION OF THE EAST BOUNDARY AND

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 13, 14, 23, 24, AND 25

IN

TOWNSHIP 12 NORTH, RANGE 22 EAST

OF THE PRINCIPAL MERIDIAN

IN THE STATE OF MONTANA

EXECUTED BY


Andrew J. Varilek
Cadastral Surveyor

Under special instructions dated October 21, 2014, which provided for the surveys included under Group Number 1128, Montana, and assignment instructions dated October 21, 2014.

Survey commenced October 22, 2014
Survey completed April 28, 2015

INDEX DIAGRAM

Township 12 North, Range 22 East
Principal Meridian, Montana
Group 1128

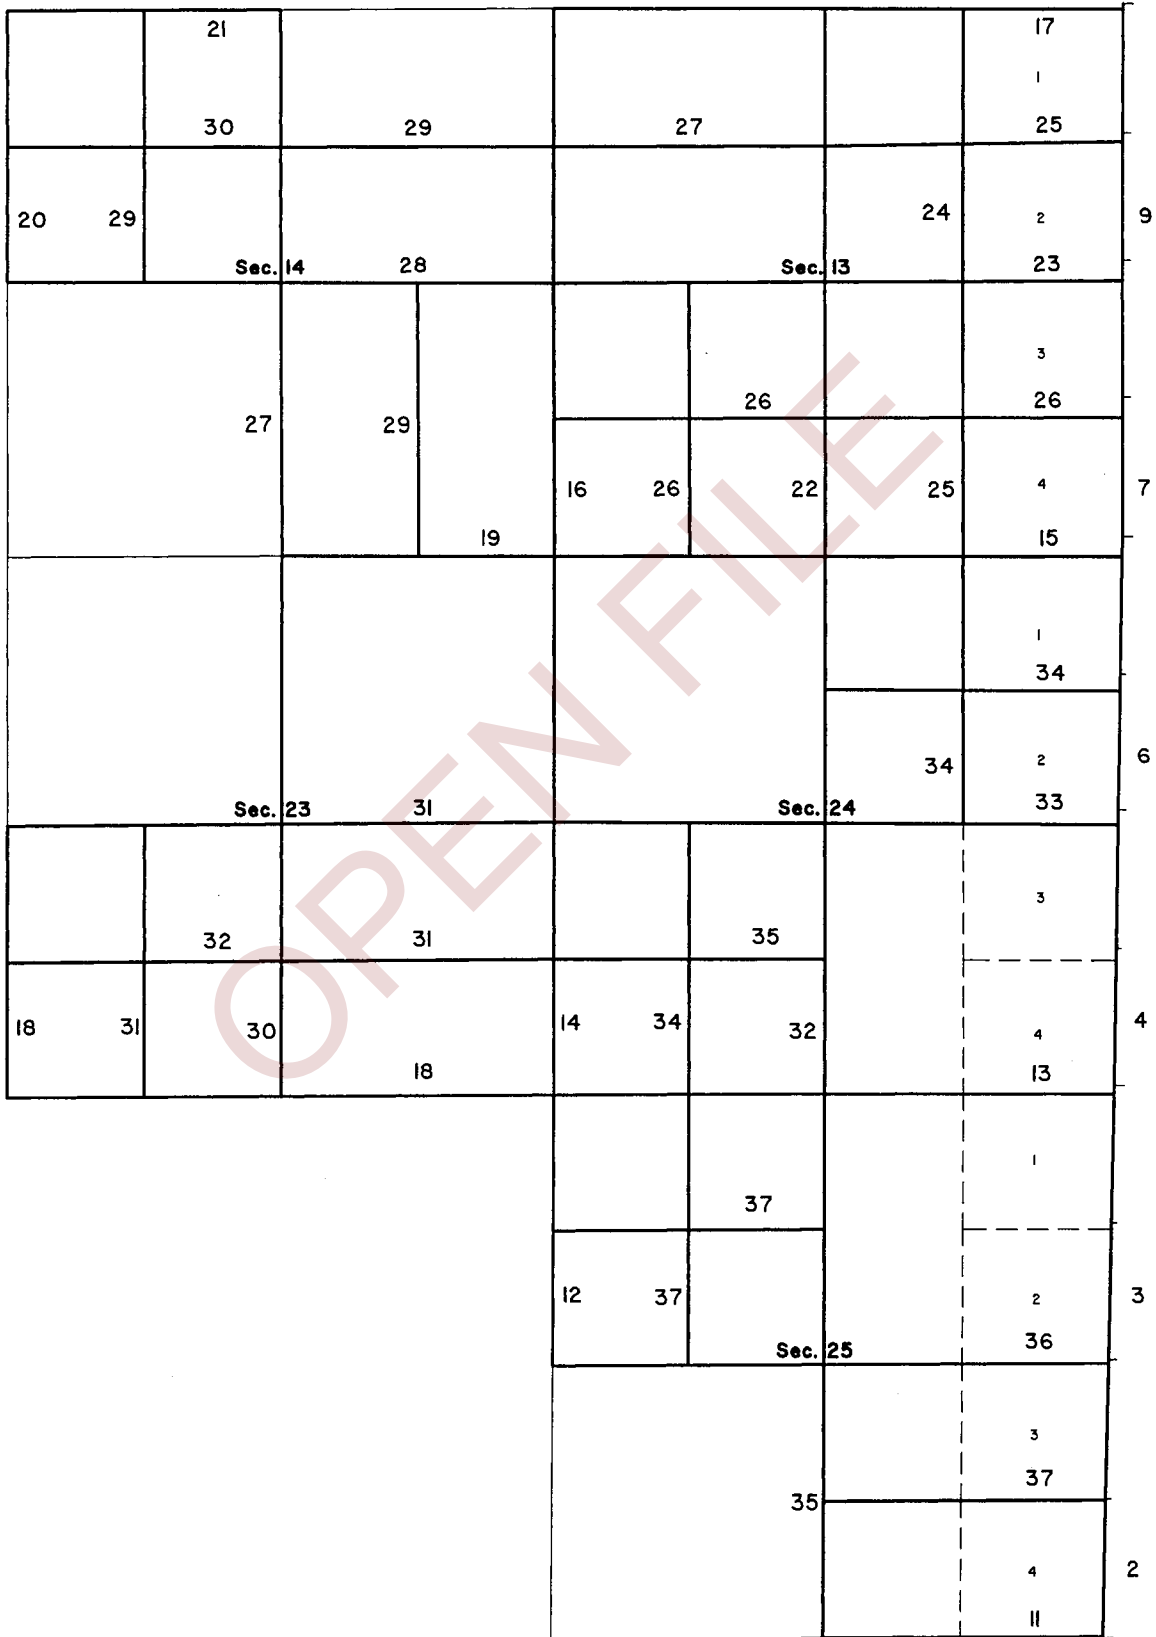

Township 12 North, Range 22 East
Principal Meridian, Montana

The following field notes are those of the dependent resurvey of a portion of the east boundary and a portion of the subdivisional lines, and the subdivision of sections 13, 14, 23, 24, and 25, in Township 12 North, Range 22 East, Principal Meridian, Montana.

The history of surveys pertaining to this resurvey is as follows:

Philip M. Gallaher, U.S. Deputy Surveyor, surveyed the south, east, and west boundaries in 1882, as shown on the official plat approved February 7, 1883.

William R. Bandy and George L. Campbell, U.S. Transitmen, resurveyed the south and east boundaries and independently resurveyed the subdivisional lines in 1914, as shown on the official plat approved November 4, 1915.

Woodrow E. Damm, Cadastral Engineer, dependently resurveyed portions of the south and west boundaries and the subdivisional lines of Township 12 North, Range 23 East, in 1965, as shown on the official plat accepted October 1, 1969.

The survey was executed in accordance with the specifications as set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions dated October 21, 2014 for Group Number 1128, Montana.

In initiating this work, retracements of the previous surveys were performed and a diligent search was made to identify evidence of the previously established corner monuments and other calls of the record. Identified corners were remonumented, as necessary, in their original positions.

All standard monuments are stainless steel posts, 30 ins. long, 2 1/2 ins. diam., with a magnet encased in plastic beneath, unless otherwise specified.

The locational calls to fences contained herein are given as ground conditions existed at the time of survey. Subsequent discussions have begun, during the construction of this record, indicating the potential for many of the fences to move. Future reliance on these locational calls for the reestablishment of lost or obliterated corners should consider this fact.

The direction and measurements of the lines of this survey refer to the true meridian and were determined by Global Positioning System-Real Time Kinematic (GPS-RTK) methods.


Geodetic control (NAD83) for this survey project was established utilizing static Global Positioning System (GPS) observations post-processed by National Geodetic Survey's (NGS) Online Positioning User Service (OPUS). The geographic position of the cor. of secs. 11, 12, 13, and 14, as determined by GPS-RTK methods is as follows:

Township 12 North, Range 22 East
Principal Meridian, Montana

Latitude: 46° 48' 29.187" N.
Longitude: 108° 54' 13.795" W.

The geographic position of the 1/4 cor. of secs. 25 and 26, as determined by GPS-RTK methods is as follows:

Latitude: 46° 46' 18.946" N.
Longitude: 108° 54' 14.214" W.

	<p style="text-align: center;">Dependent Resurvey of a Portion of the East Boundary Township 12 North, Range 22 East Principal Meridian, Montana</p> <hr/> <p style="text-align: center;">Reestablishment of the Surveys Executed by Philip M. Gallaher, United States Deputy Surveyor, in 1882, William R. Bandy and George L. Campbell, United States Transitmen, in 1914, and Woodrow E. Damm, Cadastral Engineer, in 1965.</p> <hr/> <p>Beginning at the cor. of secs. 25 and 36 only, on the E bdy. of the Tp., monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, in a collar of stone, 2 ft. diam., with brass cap mkd.</p> <div style="text-align: center;">  <p style="margin-left: 100px;">T 12 N R 22 E R 23 E S 25 S 31 — S 36</p> </div> <p style="text-align: center;">1914</p> <p>Set a steel fence post alongside the iron post.</p> <p>The cor. is situated S. 9° E., 29 ft. dist. from a cor. of fences extending N and W.</p> <p>N. 1° 02' 10" E., on the E bdy. of the Tp.</p> <p>1321.4 Point for the S 1/16 sec. cor. of sec. 25 only, determined latitudinally at proportionate measurement bet. the cor. of secs. 25 and 36 only and the 1/4 sec. cor. of sec. 25 only, using the 1914 survey record, and</p>
--	---

Dependent Resurvey of a Portion of the East Boundary
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

	<p>longitudinally on the line bet. the cor. of secs. 25 and 36 only and the S 1/16 sec. cor. of sec. 30 only.</p> <p>Set a standard monument, 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E R 23 E S 1/16 S 25 </p> <p style="text-align: center;">2014</p> <p>Set a steel fence post alongside and raise a collar of stone, 2 1/2 ft. diam., around the standard monument.</p> <p>The cor. is situated S. 55° E., 8 1/2 ft. dist., from a cor. of fences extending S and W.</p>
<p>1333.6</p>	<p>The S 1/16 sec. cor. of sec. 30 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 23 E S 1/16 S 30</p> <p style="text-align: center;">1965</p> <hr style="width: 30%; margin: auto;"/> <p>N. 1° 08' 40" E., beginning new measurement.</p>
<p>1309.3</p>	<p>The 1/4 sec. cor. of sec. 25 only, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">1/4 S 25 </p> <p style="text-align: center;">1914</p> <hr style="width: 30%; margin: auto;"/> <p>N. 1° 50' 20" W., beginning new measurement.</p>

Dependent Resurvey of a Portion of the East Boundary
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
38.1	<p>The 1/4 sec. cor. of sec. 30 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 12 N R 23 E</p> <p> 1/4</p> <p> S 30</p> <p>1965</p> </div> <p>from which the original bearing tree:</p> <p style="padding-left: 40px;">A pine, 10 ins. diam., bears N. 74° 20' E., 18.9 ft. dist., mkd. with a healed blaze. (Record: 27 lks.).</p> <hr style="width: 20%; margin: 0 auto;"/> <p>N. 1° 06' 50" E., beginning new measurement.</p>
1270.9	<p>Point for the N 1/16 sec. cor. of sec. 25 only, determined at proportionate measurement bet. the 1/4 sec. cor. of sec. 30 only and the cor. of secs. 24 and 25 only, using the 1914 survey record.</p> <p>Set a standard monument, 18 ins. in the ground to bedrock, in a supporting collar of stone, 3 ft. diam., 1 ft. high, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 12 N</p> <p>R 22 E R 23 E</p> <p>N 1/16 </p> <p>S 25 </p> <p>2015</p> </div>
1335.8	<p>Point for the N 1/16 sec. cor. of sec. 30 only, determined at proportionate measurement between the 1/4 sec. cor. of sec. 30 only, and the cor. of secs. 24 and 25 only, using the 1914 survey record. Not monumented.</p>
2581.1	<p>The cor. of secs. 24 and 25 only, monumented with an iron post, 3 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the East Boundary
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

	<p style="text-align: center;">T 12 N R 22 E R 23 E S 24 ——— S 30 S 25 1914</p> <p>from which the original bearing trees:</p> <p style="padding-left: 40px;">A pine, 14 ins. diam., bears S. 28° 30' W., 28.3 ft. dist., mkd. with a healed blaze. (Record: 43 lks.).</p> <p style="padding-left: 40px;">A pine, 14 ins. diam., bears N. 45° W., 44.2 ft. dist., mkd. with a healed blaze. (Record: 67 lks.).</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 0° 59' 40" E., beginning new measurement.</p>
<p>89.1</p>	<p>The cor. of secs. 19 and 30 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 23 E S 19 ——— S 30 1965</p> <p>from which the original bearing trees:</p> <p style="padding-left: 40px;">A pine snag, 12 ins. diam., bears N. 4° 20' E., 34.3 ft. dist., mkd. with a healed blaze. (Record: 52 lks.).</p> <p style="padding-left: 40px;">A pine, 14 ins. diam., bears S. 34° 30' E., 25.1 ft. dist., mkd. with a healed blaze. (Record: 38 lks.).</p> <hr style="width: 20%; margin: 20px auto;"/> <p>N. 0° 56' 40" E., beginning new measurement.</p>
<p>1217.8</p>	<p>Point for the S 1/16 sec. cor. of sec. 24 only, determined latitudinally at proportionate measurement bet. the cor. of secs. 19 and 30 only and the 1/4 sec. cor. of sec. 24 only, using the 1914 survey record, and</p>

Dependent Resurvey of a Portion of the East Boundary
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
	<p>longitudinally on the line bet. the cor. of secs. 19 and 30 only and the S 1/16 sec. cor. of sec. 19 only.</p> <p>Set a standard monument, 18 ins. in the ground to bedrock, in a supporting collar of stone, 2 1/2 ft. diam., 1 ft. high, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E R 23 E S 1/16 S 24 </p> <p style="text-align: center;">2015</p>
1334.7	<p>The S 1/16 sec. cor. of sec. 19 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 23 E S 1/16 S 19 </p> <p style="text-align: center;">1965</p>
1191.2	<p>N. 0° 58' 50" E., beginning new measurement.</p> <p>The 1/4 sec. cor. of sec. 24 only, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, with a mound of stone, 2 ft. base, 1 ft. high, to the W, 2 1/2 ft. dist., and a mound of stone, 2 ft. base, 1 ft. high, to the E, 1 ft. dist., with brass cap mkd.</p> <p style="text-align: center;">S 24 1/4 </p> <p style="text-align: center;">1914</p>
141.8	<p>N. 0° 21' 10" E., beginning new measurement.</p> <p>The 1/4 sec. cor. of sec. 19 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 16 ins. above ground, in a collar of stone, 3 ft. diam., 1 ft. high, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the East Boundary
Township 12 North, Range 22 East
Principal Meridian, Montana

Feet													
	<div style="text-align: center;"> <table border="0"> <tr><td> </td><td>T 12 N</td></tr> <tr><td> </td><td>R 23 E</td></tr> <tr><td> </td><td>1/4 S 19</td></tr> </table> <p>1965</p> <hr/> </div>		T 12 N		R 23 E		1/4 S 19						
	T 12 N												
	R 23 E												
	1/4 S 19												
1174.3	<p>N. 1° 00' 30" E., beginning new measurement.</p> <p>Point for the N 1/16 sec. cor. of sec. 24 only, determined latitudinally at proportionate measurement bet. 1/4 sec. cor. of sec. 19 only and the cor. of secs. 13 and 24 only, using the 1914 survey record, and longitudinally on the line bet. the 1/4 sec. cor. of sec. 19 only and the N 1/16 sec. cor. of sec. 19 only.</p> <p>Set a standard monument, 22 ins. in the ground, with brass cap mkd.</p>												
	<div style="text-align: center;"> <table border="0"> <tr><td></td><td>T 12 N</td><td></td></tr> <tr><td></td><td>R 22 E</td><td>R 23 E</td></tr> <tr><td></td><td>N 1/16</td><td> </td></tr> <tr><td></td><td>S 24</td><td> </td></tr> </table> <p>2015</p> </div>		T 12 N			R 22 E	R 23 E		N 1/16			S 24	
	T 12 N												
	R 22 E	R 23 E											
	N 1/16												
	S 24												
1342.7	<p>Raise a collar of stone, 2 ft. diam., around the standard monument.</p> <p>The N 1/16 sec. cor. of sec. 19 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, in a collar of stone, 2 ft. diam., with brass cap mkd.</p>												
	<div style="text-align: center;"> <table border="0"> <tr><td> </td><td>T 12 N</td></tr> <tr><td> </td><td>R 23 E</td></tr> <tr><td> </td><td>N 1/16 S 19</td></tr> </table> <p>1965</p> <hr/> </div>		T 12 N		R 23 E		N 1/16 S 19						
	T 12 N												
	R 23 E												
	N 1/16 S 19												
1148.1	<p>N. 0° 56' 00" E., beginning new measurement.</p> <p>The cor. of secs. 13 and 24 only, monumented with an iron post, 3 ins. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd.</p>												

Dependent Resurvey of a Portion of the East Boundary
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

	<div style="text-align: center;"> <p>T 12 N R 22 E R 23 E S 13 S 18 ——— ——— S 24 S 19</p> <p>1914</p> <p>from which the original bearing tree:</p> <p style="padding-left: 40px;">A pine, 20 ins. diam., bears S. 12° 20' W., 74.6 ft. dist., mkd. with a healed blaze. (Record: 113 lks.).</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 1° 17' 10" E., beginning new measurement.</p> <p>194.6 The cor. of secs. 18 and 19 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above ground, in a collar of stone, 3 ft. diam., with brass cap mkd.</p> <div style="text-align: center; margin-top: 20px;"> <p>T 12 N T 12 N R 22 E R 23 E S 13 S 18 ——— ——— S 19</p> <p>1965</p> <hr style="width: 30%; margin: 10px auto;"/> <p>N. 0° 07' 00" E., beginning new measurement.</p> <p>1133.9 Point for the S 1/16 sec. cor. of sec. 13 only, determined latitudinally at proportionate measurement bet. the cor. of secs. 18 and 19 only and the 1/4 sec. cor. of sec. 13 only, using the 1914 survey record, and longitudinally on the line bet. the cor. of secs. 18 and 19 only and the S 1/16 sec. cor. of sec. 18 only.</p> <p>Set a standard monument, 22 ins. in the ground, with brass cap mkd.</p> </div> </div>
--	--

Dependent Resurvey of a Portion of the East Boundary
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
	<p style="text-align: center;">T 12 N R 22 E R 23 E S 1/16 S 13 </p> <p style="text-align: center;">2015</p> <p>Raise a collar of stone, 2 ft. diam., around the standard monument.</p>
1335.6	<p>The S 1/16 sec. cor. of sec. 18 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 26 ins. above ground, in a supporting collar of stone, 2 1/2 ft. diam., 1 1/2 ft. high, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 23 E S 1/16 S 18</p> <p style="text-align: center;">1965</p> <p>from which the original bearing tree:</p> <p style="text-align: center;">A pine, 12 ins. diam., bears S. 31° E., 11.9 ft. dist., mkd. with a healed blaze. (Record: 18 lks.)</p> <hr style="width: 30%; margin: auto;"/> <p>N. 0° 04' 10" E., beginning new measurement.</p>
1129.1	<p>The 1/4 sec. cor. of sec. 13 only, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">S 13 1/4 </p> <p style="text-align: center;">1914</p> <hr style="width: 30%; margin: auto;"/> <p>N. 0° 06' 30" W., beginning new measurement.</p>
205.7	<p>The 1/4 sec. cor. of sec. 18 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, in an embedded collar of stone, 2 ft. diam., with brass cap mkd.</p>

Dependent Resurvey of a Portion of the East Boundary
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

	<p style="text-align: center;"> T 12 N R 23 E 1/4 S 18 1965 </p> <hr/>
<p>1156.9</p>	<p>N. 0° 03' 00" E., beginning new measurement.</p> <p>Point for the N 1/16 sec. cor. of sec. 13 only, determined latitudinally at proportionate measurement bet. 1/4 sec. cor. of sec. 18 only and the cor. of secs. 12 and 13 only, using the 1914 survey record, and longitudinally on the line bet. the 1/4 sec. cor. of sec. 18 only and the N 1/16 sec. cor. of sec. 18 only.</p> <p>Set a standard monument, 22 ins. in the ground, with brass cap mkd.</p>
	<p style="text-align: center;"> T 12 N R 22 E R 23 E N 1/16 S 13 2015 </p> <p>Raise a collar of stone, 2 1/2 ft. diam., around the standard monument.</p> <p>Cor. is situated W, 6 ft. dist., from a fence extending NE and SW.</p>
<p>1244.0</p>	<p>The N 1/16 sec. cor. of sec. 18 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 20 ins. above ground, in a supporting collar of stone, 3 ft. diam., 1 ft. high, with brass cap mkd.</p> <p style="text-align: center;"> T 12 N R 23 E N 1/16 S 18 1965 </p> <hr/>
<p>1191.2</p>	<p>N. 0° 07' 10" E., beginning new measurement.</p> <p>The cor. of secs. 12 and 13 only, monumented with an iron post, 3 ins. diam., firmly set, projecting 8 ins. above ground, with a mound of stone,</p>

Dependent Resurvey of a Portion of the East Boundary
Township 12 North, Range 22 East
Principal Meridian, Montana

Feet

3 ft. base, 1 ft. high to the E, 3 ft. dist., with brass cap mkd.

T 12 N	
R 22 E	R 23 E
S 12	S 7
S 12	S 18
S 13	

1914

N. 2° 09' 10" E., beginning new measurement.

54.7

The cor. of secs. 7 and 18 only, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, in a collar of stone, 2 ft. diam., with brass cap mkd.

T 12 N	T 12 N
R 22 E	R 23 E
	S 7
	S 18

1965

from which the original bearing tree:

A pine, 18 ins. diam., bears N. 40° E., 73.9 ft. dist., mkd. with a healed blaze. (Record: 112 lks.).

Dependent Resurvey of a Portion of the Subdivisional Lines
Township 12 North, Range 22 East
Principal Meridian, Montana

Dependent Resurvey of a Portion of the Subdivisional Lines
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

	Reestablishment of the Survey Executed by William R. Bandy and George L. Campbell, United States Transitmen, in 1914 <hr/> From the cor. of secs. 25 and 36 only, on the E bdy. of the Tp. N. 89° 56' 10" W., bet. secs. 25 and 36. 2706.1 True point for the 1/4 sec. cor. of secs. 25 and 36, at proportionate measurement, falls in a drain, unsuitable for monumentation. 2731.8 The witness 1/4 sec. cor. of secs. 25 and 36, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. <div style="text-align: center;"> <table border="1"> <tr><td>1/4</td><td> </td></tr> <tr><td>S 2</td><td> 5</td></tr> <tr><td>WC</td><td> </td></tr> <tr><td>S 3</td><td> 6</td></tr> </table> <p>1914</p> </div> from which the original bearing tree: A pine, 18 ins. diam., bears S. 88° E., 149.2 ft. dist., mkd. with a healed blaze. (Record: 226 lks.). <hr/> From the 1/4 sec. cor. of secs. 25 and 26, monumented with an iron post, 1 in. diam., firmly set, projecting 15 ins. above ground, with a mound of stone, 3 ft. base, 1 1/2 ft. high, to the W, 3 ft. dist., with brass cap mkd. <div style="text-align: center;"> <table border="1"> <tr><td>1/4</td><td> </td></tr> <tr><td>S 26</td><td> S 25</td></tr> </table> <p>1914</p> </div> from which the original bearing tree: A pine, 18 ins. diam., bears S. 8° W., 45.5 ft. dist., with no blaze visible. (Record: 69 lks.).	1/4		S 2	5	WC		S 3	6	1/4		S 26	S 25
1/4													
S 2	5												
WC													
S 3	6												
1/4													
S 26	S 25												

Dependent Resurvey of a Portion of the Subdivisional Lines
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

<p>1318.8</p>	<p>N. 0° 15' 00" E., bet. secs. 25 and 26. Point for the N 1/16 sec. cor. of secs. 25 and 26. Not monumented.</p>						
<p>2637.6</p>	<p>The cor. of secs. 23, 24, 25, and 26, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>T 12 N</td> <td>R 22 E</td> </tr> <tr> <td>S 23</td> <td>S 24</td> </tr> <tr> <td>S 26</td> <td>S 25</td> </tr> </table> <p>1914</p> </div> <p>from which the remaining original bearing trees:</p> <p>A pine, 16 ins. diam., bears N. 17° E., 4.0 ft. dist., mkd. with a healed blaze. (Record: 6 lks.).</p> <p>A pine, 14 ins. diam., bears S. 31° 30' W., 15.8 ft. dist., mkd. T12N R22E S26 BT. (Record: 24 lks.).</p> <p>A pine, 14 ins. diam., bears N. 49° 05' W., 91.1 ft. dist., mkd. with a healed blaze. (Record: 138 lks.).</p>	T 12 N	R 22 E	S 23	S 24	S 26	S 25
T 12 N	R 22 E						
S 23	S 24						
S 26	S 25						
<p>2792.5</p>	<p>From cor. of secs. 24 and 25 only, on the E bdy. of the Tp. N. 89° 38' 20" W., bet. secs. 24 and 25.</p> <p>The 1/4 sec. cor. of secs. 24 and 25, monumented with an iron post, 1 in. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd.</p> <div style="text-align: center;"> <table border="1"> <tr> <td>S 24</td> </tr> <tr> <td>1/4 S 25</td> </tr> </table> <p>1914</p> </div> <p>from which the remaining original bearing tree:</p> <p>A pine, 26 ins. diam., bears S. 84° 45' E., 21.1 ft. dist., mkd. 1/4 S25 BT. (Record: 32 lks.).</p>	S 24	1/4 S 25				
S 24							
1/4 S 25							

Dependent Resurvey of a Portion of the Subdivisional Lines
Township 12 North, Range 22 East
Principal Meridian, Montana

Feet	
1319.4	<hr/> <p>N. 89° 54' 50" W., beginning new measurement.</p> <p>Point for the W 1/16 sec. cor. of secs. 24 and 25.</p> <p>Set a standard monument, 27 ins. in the ground, with brass cap mkd.</p>
	$\begin{array}{c} \text{T 12 N} \quad \text{R 22 E} \\ \text{S 24} \\ \text{W 1/16} \quad \text{-----} \\ \text{S 25} \\ \\ 2014 \end{array}$
	<p>Set a steel fence post alongside and raise a collar of stone, 2 1/2 ft. diam., around the standard monument.</p>
	<p>The cor. is situated in a fence extending N and S.</p>
2638.8	<p>The cor. of secs. 23, 24, 25, and 26.</p> <hr/>
	<p>N. 0° 07' 20" E., bet. secs. 23 and 24.</p>
1322.8	<p>Point for the S 1/16 sec. cor. of secs. 23 and 24.</p> <p>Set a standard monument, 14 ins. in the ground to bedrock, in a supporting collar of stone, 3 ft. diam., 1 ft. high, with brass cap mkd.</p>
	$\begin{array}{c} \text{T 12 N} \quad \text{R 22 E} \\ \text{S 1/16} \\ \text{S 23} \quad \left \quad \text{S 24} \\ \\ 2014 \end{array}$
	<p>Set a steel fence post alongside the standard monument.</p>
	<p>The cor. is situated S. 75° W., 14 ft. dist., from a cor. of fences extending N and W.</p>
2645.6	<p>The 1/4 sec. cor. of secs. 23 and 24, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines
Township 12 North, Range 22 East
Principal Meridian, Montana

Feet

	$\begin{array}{c c} 1/4 & \\ \hline S 23 & S 24 \end{array}$ <p style="text-align: center;">1914</p> <hr style="width: 20%; margin: auto;"/> <p>N. 0° 10' 40" E., beginning new measurement.</p>
2613.0	<p>The cor. of secs. 13, 14, 23, and 24, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above ground, with a mound of stone, 3 ft. base, 2 ft. high, to the W, 3 ft. dist., with brass cap mkd.</p> $\begin{array}{c c} T 12 N & R 22 E \\ \hline S 14 & S 13 \\ \hline S 23 & S 24 \end{array}$ <p style="text-align: center;">1914</p> <p>from which the original bearing trees:</p> <p style="padding-left: 40px;">A pine, 24 ins. diam., bears N. 8° 30' E., 48.2 ft. dist., mkd. with illegible scribing in an open blaze. (Record: 73 lks.).</p> <p style="padding-left: 40px;">A pine, 28 ins. diam., bears S. 67° 30' W., 128.0 ft. dist., mkd. with a healed blaze. (Record: 194 lks.).</p> <hr style="width: 20%; margin: auto;"/> <p>From the cor. of secs. 13 and 24 only, on the E bdy. of the Tp.</p> <p>N. 89° 38' 40" W., bet. secs. 13 and 24.</p>
1545.1	<p>Point for the E 1/16 sec. cor. of secs. 13 and 24.</p> <p>Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p> $\begin{array}{c c} T 12 N & R 22 E \\ \hline S 13 & \\ \hline E 1/16 & \hline S 24 & \end{array}$ <p style="text-align: center;">2015</p>

Dependent Resurvey of a Portion of the Subdivisional Lines
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

	<p>An iron post 30 ins. long, 3/4 in. diam., found lying loose nearby.</p> <p>Bury the iron post alongside, set a steel fence post alongside, and raise a collar of stone, 2 ft. diam., around the standard monument.</p>
2864.0	<p>The 1/4 sec. cor. of secs. 13 and 24, monumented with an iron post, 1 in. diam., firmly set, projecting 12 ins. above ground, with a mound of stone, 3 ft. base, 1/2 ft. high, to the W, 2 ft. dist., with brass cap mkd.</p> <div style="text-align: center;"> <p>13</p> <hr style="width: 50px; margin: 0 auto;"/> <p>1/4 24</p> <p>1914</p> <hr style="width: 300px; margin: 0 auto;"/> </div>
	<p>N. 89° 39' 40" W., beginning new measurement.</p>
1319.7	<p>Point for the W 1/16 sec. cor. of secs. 13 and 24. Not monumented.</p>
2639.4	<p>The sec. cor. of secs. 13, 14, 23, and 24.</p> <hr style="width: 500px; margin: 0 auto;"/>
	<p>N. 0° 01' 20" E., bet. secs. 13 and 14.</p>
1316.6	<p>Point for the S 1/16 sec. cor. of secs. 13 and 14. Not monumented.</p>
2633.2	<p>The 1/4 sec. cor. of secs. 13 and 14, monumented with an iron post, 1 in. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>S 14 1/4 S 13</p> <p>1914</p> <hr style="width: 300px; margin: 0 auto;"/> </div>
	<p>N. 0° 03' 50" E., beginning new measurement.</p>
1334.3	<p>Point for the N 1/16 sec. cor. of secs. 13 and 14.</p> <p>Set a standard monument, 18 ins. in the ground to bedrock, in a supporting collar of stone, 3 ft. diam., 1 ft. high, with brass cap mkd.</p>

Dependent Resurvey of a Portion of the Subdivisional Lines
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

	<p style="text-align: center;">T 12 N R 22 E N 1/16 S 14 S 13 2014</p> <p>Set a steel fence post alongside the standard monument.</p> <p>The cor. is situated S, 35 ft. dist., from a fence extending E and W.</p>
<p>2688.6</p>	<p>The cor. of secs. 11, 12, 13, and 14, monumented with an iron post, 2 ins. diam., firmly set, projecting 8 ins. above ground, in a collar of stone, 3 ft. diam., with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E S 11 S 12 ———— S 14 S 13 1914</p>
	<hr/> <p>From the cor. of secs. 12 and 13 only.</p> <p>N. 89° 38' 10" W., bet. secs. 12 and 13.</p>
<p>1546.8</p>	<p>Point for the E 1/16 sec. cor. of secs. 12 and 13. Not monumented.</p>
<p>2867.7</p>	<p>True point for the 1/4 sec. cor. of secs. 12 and 13, at proportionate measurement, falls in a stock pond, unsuitable for monumentation.</p> <p>From this point, the point selected for the witness 1/4 sec. cor. of secs. 12 and 13 bears N. 89° 51' 20" W., 85.6 ft. dist.</p> <p>Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">WC T 12 N R 22 E S 12 1/4 —————> S 13 2015</p>

Dependent Resurvey of a Portion of the Subdivisional Lines
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet													
5509.6	The cor. of secs. 11, 12, 13, and 14. <hr/>												
	From the cor. of secs. 23, 24, 25, and 26. N. 89° 59' 40" W., bet. secs. 23 and 26.												
2639.9	The 1/4 sec. cor. of secs. 23 and 26, monumented with an iron post, 1 in. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. <div style="text-align: center;"> <table border="0"> <tr><td>1/4</td><td>S 23</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td></td><td>S 26</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td></td><td>1914</td></tr> </table> </div> Raise a collar of stone, 2 1/2 ft. diam., around the iron post. <hr/>	1/4	S 23	<hr/>			S 26	<hr/>			1914		
1/4	S 23												
<hr/>													
	S 26												
<hr/>													
	1914												
	N. 89° 58' 20" W., beginning new measurement.												
1320.6	Point for the W 1/16 sec. cor. of secs. 23 and 26. Not monumented.												
2641.2	The cor. of secs. 22, 23, 26, and 27, monumented with an iron post, 2 ins. diam., firmly set, projecting 14 ins. above ground, with a mound of stone, 2 ft. base, 1 1/2 ft. high, to the W, 2 ft. dist., with brass cap mkd. <div style="text-align: center;"> <table border="0"> <tr><td>T 12 N</td><td>R 22 W</td></tr> <tr><td>S 22</td><td>S 23</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 27</td><td>S 26</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td></td><td>1914</td></tr> </table> </div> <hr/>	T 12 N	R 22 W	S 22	S 23	<hr/>		S 27	S 26	<hr/>			1914
T 12 N	R 22 W												
S 22	S 23												
<hr/>													
S 27	S 26												
<hr/>													
	1914												
	N. 0° 07' 30" E., bet. secs. 22 and 23.												
1316.7	Point for the S 1/16 sec. cor. of secs. 22 and 23. Not monumented.												
2633.4	The 1/4 sec. cor. of secs. 22 and 23, monumented with an iron post, 1 in. diam., firmly set, projecting 11 ins. above ground, with brass cap mkd.												

Dependent Resurvey of a Portion of the Subdivisional Lines
Township 12 North, Range 22 East
Principal Meridian, Montana

Feet

	<p style="text-align: center;">1/4</p> <p style="text-align: center;">S 22 S 23</p> <p style="text-align: center;">1914</p> <p>from which the remaining original bearing tree:</p> <p style="padding-left: 40px;">A pine, 18 ins. diam., bears S. 48° 30' E., 57.4 ft. dist., mkd. S23 BT and other illegible scribing in a partially healed blaze. (Record: 87 lks.).</p> <hr/> <p>From the cor. of secs. 13, 14, 23, and 24.</p> <p>N. 89° 37' 30" W., bet. secs. 14 and 23.</p> <p>1318.7 Point for the E 1/16 sec. cor. of secs. 14 and 23.</p> <p>Set a standard monument, 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E S 14 E 1/16 ——— S 23</p> <p style="text-align: center;">2014</p> <p>Set a steel fence post alongside and raise a collar of stone, 2 ft. diam., around the standard monument.</p> <p>2637.4 The 1/4 sec. cor. of secs. 14 and 23, determined at record distance-distance intersection from the two original bearing trees:</p> <p style="padding-left: 40px;">A pine, 17 ins. diam., bears N. 22° 00' E., 91.1 ft. dist., mkd. 1/4 S14 in a partially healed blaze. (Record: 138 lks.).</p> <p style="padding-left: 40px;">A pine, 15 ins. diam., bears S. 82° 10' E., 100.3 ft. dist., mkd. 1/4 BT and other illegible scribing in a partially healed blaze. (Record: 152 lks.).</p> <p>The remains of the original monument, an iron post, 20 ins. long, 1 in. diam., with brass cap mkd 1/4 S14 S23 1914 was found lying loose nearby in an area disturbed by recent earthmoving work.</p>
--	--

Dependent Resurvey of a Portion of the Subdivisional Lines
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

	<p>At the corner point</p> <p>Set a standard monument, 25 ins. in the ground, with brass cap mkd.</p> $\begin{array}{r} T 12 N \quad R 22 E \\ \quad \quad S 14 \\ 1/4 \quad \text{---} \\ \quad \quad S 23 \\ \\ 2014 \end{array}$ <p>Set a steel fence post alongside and raise a collar of stone, 2 1/2 ft. diam., around the standard monument.</p> <p>The cor. is situated S. 32° E., 29.5 ft. distant, from a cor. of fences extending S and E.</p> <hr/> <p>From the 1/4 sec. cor. of secs. 14 and 15, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd.</p> $\begin{array}{c} S 15 \ 1/4 \quad \quad S 14 \\ \\ 1914 \end{array}$ <p>from which the remaining original bearing tree:</p> <p style="padding-left: 40px;">A pine, 24 ins. diam., bears S. 46° 20' W., 33.7 ft. dist., mkd. with a fully healed blaze. (Record: 51 lks.).</p> <p>N. 0° 02' 30" E., bet. secs. 14 and 15.</p> <p>1318.9 Point for the N 1/16 sec. cor. of secs. 14 and 15. Not monumented.</p> <p>2637.8 The cor. of secs. 10, 11, 14, and 15, monumented with an iron post, 2 ins. diam., firmly set, projecting 10 ins. above ground, with a mound of stone, 3 ft. base, 1 ft. high, to the W, 3 ft. dist., with brass cap mkd.</p>
--	--

Dependent Resurvey of a Portion of the Subdivisional Lines
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

	<p style="text-align: center;">T 12 N R 22 W S 10 S 11 <hr style="width: 50%; margin: 0 auto;"/> S 15 S 14 <hr style="width: 50%; margin: 0 auto;"/> 1914</p> <hr/> <p>From the 1/4 sec. cor. of secs. 11 and 14, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd.</p> <p style="text-align: center;">S 11 1/4 <hr style="width: 50%; margin: 0 auto;"/> S 14 <hr style="width: 50%; margin: 0 auto;"/> 1914</p> <p>N. 89° 55' 40" W., bet. secs. 11 and 14.</p>
1316.0	Point for the W 1/16 sec. cor. of secs. 11 and 14. Not monumented.
2632.0	The cor. of secs. 10, 11, 14, and 15.
	<hr/> <p>Subdivision of Sections 13, 14, 23, 24, and 25 Township 12 North, Range 22 East Principal Meridian, Montana</p> <hr/>

Subdivision of Sections 13, 14, 23, 24, and 25
Township 12 North, Range 22 East
Principal Meridian, Montana

Feet

Section 13	
	<p>From the 1/4 sec. cor. of secs. 13 and 24.</p> <p>N. 0° 04' 40" E., on the N-S center line of sec. 13.</p>
1322.6	<p>The C-S 1/16 sec. cor. of sec. 13, monumented with an iron post of unknown origin, 30 ins. long, 3/4 in. diam., firmly set, 20 ins. in the ground; and is accepted as a careful and faithful establishment of the position of the cor.</p> <p>At the corner point</p> <p>Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T 12 N R 22 E</p> <p> C</p> <p> </p> <p>S 1/16 S 13</p> <p> C</p> <p>2015</p> </div> <p>Bury the iron post alongside, set a steel fence post alongside, and raise a collar of stone, 2 ft. diam., around the standard monument.</p>
	<p>N. 0° 04' 40" E., beginning new measurement.</p>
1322.6	<p>The C 1/4 sec. cor. of sec. 13, monumented with an iron post of unknown origin, 30 ins. long, 3/4 in. diam., firmly set, 15 ins. in the ground, in a supporting collar of stone, 3 ft. diam., 1 ft. high; and is accepted as a careful and faithful establishment of the position of the cor.</p> <p>At the corner point</p> <p>Set a standard monument, 15 ins. in the ground to bedrock, in a supporting collar of stone, 3 ft. diam., 1 ft. high, with brass cap mkd.</p>

Subdivision of Sections 13, 14, 23, 24, and 25
Township 12 North, Range 22 East
Principal Meridian, Montana

Feet

	<p>T 12 N R 22 E C 1/4 S 13 2015</p> <p>Bury the iron post and set a steel fencepost alongside the standard monument.</p> <hr/> <p>N. 0° 04' 40" E., beginning new measurement.</p>
1327.7	<p>Point for the C-N 1/16 sec. cor. of sec. 13.</p> <p>Set a standard monument, 22 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E C N 1/16 S 13 C 2015</p> <p>Set a steel fence post alongside the standard monument.</p> <p>The cor. is situated S, 34 ft. dist., from a cor. of fences extending E and W.</p>
2655.4	<p>The true point for the 1/4 sec. cor. of secs. 12 and 13.</p> <hr/> <p>From the 1/4 sec. cor. of sec. 13 only, on the E bdy. of the Tp. N. 89° 55' 30" W., on the E-W center line of sec. 13.</p>
1547.3	<p>Point for the C-E 1/16 sec. cor. of sec. 13.</p> <p>Set a standard monument, 23 ins. in the ground, with brass cap mkd.</p>

24
 Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
	T 12 N R 22 E E 1/16 C ——— C S 13 2015
	Set a steel fence post alongside and raise a collar of stone, 2 1/2 ft. diam., around the standard monument.
	The cor. is situated W, 15 ft. dist., from a fence extending N and S.
2868.4	The C 1/4 sec. cor. of sec. 13 <hr style="width: 50%; margin: 0 auto;"/> N. 89° 55' 30" W., beginning new measurement.
1320.8	The C-W 1/16 sec. cor. of sec. 13, monumented with an iron post, of unknown origin, 30 ins. long, 3/4 in. diam., firmly set, 15 ins. in the ground; and is accepted as a careful and faithful establishment of the position of the cor. At the corner point Set a standard monument, 24 ins. in the ground, with brass cap mkd.
	T 12 N R 22 E W 1/16 C ——— C S 13 2014
	Bury the iron post and set a steel fence post alongside the standard monument.
	<hr style="width: 50%; margin: 0 auto;"/> N. 89° 55' 30" E., beginning new measurement.
1320.8	The 1/4 sec. cor. of secs. 13 and 14. <hr style="width: 50%; margin: 0 auto;"/> From the C-E 1/16 sec. cor. of sec. 13.

Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
1343.7	<p>N. 0° 04' 40" E., on the N-S center line of the NE1/4 of sec. 13.</p> <p>Point for the NE 1/16 sec. cor. of sec. 13, at the intersection with the E-W center line of the NE1/4 of sec. 13.</p> <p>Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E NE 1/16 S 13</p> <p style="text-align: center;">2015</p> <p>Set a steel fence post alongside and raise a collar of stone, 2 ft. diam., around the standard monument.</p>
2648.6	<p>The point for the E 1/16 sec. cor. of secs. 12 and 13.</p> <hr/> <p>From the N 1/16 sec. cor. of sec. 13 only, on the E bdy. of the Tp. S. 89° 22' 40" W., on the E-W center line of the NE1/4 of sec. 13.</p>
1546.2	<p>The NE 1/16 sec. cor. of sec. 23.</p>
2867.3	<p>The C-N 1/16 sec. cor. of sec. 13.</p> <hr/> <p>From the E 1/16 sec. cor. of secs. 13 and 24.</p> <p>N. 0° 07' 40" E., on the N-S center line of the SE1/4 of sec. 13.</p>
1325.3	<p>Point for the SE 1/16 sec. cor. of sec. 13, at the intersection with the E-W center line of the SE1/4 of sec. 13.</p> <p>Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E SE 1/16 S 13</p> <p style="text-align: center;">2015</p> <p>Set a steel fence post alongside the standard monument.</p>

26
 Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

2651.7	<p>The C-E 1/16 sec. cor. of sec. 13.</p> <hr style="width: 50%; margin-left: 0;"/> <p>From the S 1/16 sec. cor. of sec. 13 only, on the E bdy. of the Tp. N. 89° 45' 40" W., on the E-W center line of the SE1/4 of sec. 13.</p>
1548.6	<p>The SE 1/16 sec. cor. of sec. 13.</p>
2668.6	<p>The C-S 1/16 sec. cor. of sec. 13.</p> <hr style="width: 50%; margin-left: 0;"/> <p>From the point for the W 1/16 sec. cor. of secs. 13 and 24. N. 0° 03' 00" E., on the N-S center line of the SW1/4 of sec. 13.</p>
1319.6	<p>The SW 1/16 sec. cor. of sec. 13, monumented with an iron post, of unknown origin, 30 ins. long, 3/4 in. diam., firmly set, 15 ins. in the ground; and is accepted as a careful and faithful establishment of the position of the cor.</p> <p>At the corner point</p> <p>Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E SW 1/16 S 13</p> <p style="text-align: center;">2015</p> <p>Bury the iron post alongside, set a steel fence post alongside, and raise a collar of stone, 2 ft. diam. around the standard monument.</p> <hr style="width: 50%; margin-left: 0;"/> <p>N. 0° 03' 00" E., beginning new measurement.</p>
1319.6	<p>The C-W 1/16 sec. cor. of sec. 13.</p> <hr style="width: 50%; margin-left: 0;"/> <p>From the C-S 1/16 sec. cor. of sec. 13. N. 89° 47' 40" W., on the E-W center line of the SW1/4 of sec. 13.</p>

Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
1320.3	The SW 1/16 sec. cor. of sec. 13. <hr/>
	N. 89° 47' 40" W., beginning new measurement.
1320.3	The point for the S 1/16 sec. cor. of secs. 13 and 14. <hr/>
	From the C-N 1/16 sec. cor. of sec. 13.
	N. 89° 46' 50" W., on the E-W center line of the NW1/4 of sec. 13.
2641.7	The N 1/16 sec. cor. of secs. 13 and 14. <hr/>
	Section 14 <hr/>
	From the 1/4 sec. cor. of secs. 14 and 23.
	N. 0° 02' 00" W., on the N-S center line of sec. 14.
2634.6	Point for the C 1/4 sec. cor. of sec. 14, at the intersection with the E-W center line of sec. 14.
	Set a standard monument, 14 ins. in the ground to bedrock, in a supporting collar of stone, 2 1/2 ft. diam., 1 ft high, with brass cap mkd.
	T 12 N R 22 E
	C 1/4
	S 14
	2015
	Set a steel fence post alongside the standard monument.
	The cor. is situated S, 15 ft. dist., from a fence extending E and W.
3961.1	Point for the C-N 1/16 sec. cor. of sec. 14.
	Set a standard monument, 22 ins. in the ground, with brass cap mkd.

Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

<p>5287.6</p>	<p style="text-align: center;">T 12 N R 22 E C N 1/16 S 14 C 2015</p> <p>Set a steel fence post alongside the standard monument. The cor. is situated S, 26 ft. dist., from a fence extending E and W. The 1/4 sec. cor. of secs. 11 and 14.</p> <hr/>
<p>1319.7</p>	<p>From the 1/4 sec. cor. of secs. 13 and 14. N. 89° 35' 40" W., on the E-W center line of sec. 14. Point for the C-E 1/16 sec. cor. of sec. 14. Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p>
<p>2639.4</p>	<p style="text-align: center;">T 12 N R 22 E E 1/16 C ——— C S 14 2015</p> <p>Set a steel fence post alongside the standard monument. The cor. is situated S, 25 ft. dist., from a cor. of fences extending S and W.</p>
<p>3957.4</p>	<p>The C 1/4 sec. cor. of sec. 14 Point for the C-W 1/16 sec. cor. of sec. 14. Set a standard monument, 12 ins. in the ground to bedrock, in a supporting collar of stone, 3 ft. diam., 1 ft. high, with brass cap mkd.</p>

Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	T 12 N R 22 E W 1/16 C ——— C S 14 2015
5275.4	Set a steel fence post alongside the standard monument. The cor. is situated S, 10 ft. dist., from fence extending E and W. The 1/4 sec. cor. of secs. 14 and 15.
2641.4	<hr/> From the N 1/16 sec. cor. of secs. 13 and 14. N. 89° 45' 50" W., on the E-W center line of the NE1/4 of sec. 14. The C-N 1/16 sec. cor. of sec. 14.
2633.9	<hr/> From the E 1/16 sec. cor. of secs. 14 and 23. N. 0° 00' 20" W., on the N-S center line of the SE1/4 of sec. 14. The C-E 1/16 sec. cor. of sec. 14.
1322.7	<hr/> From the C-W 1/16 sec. cor. of sec. 14. N. 0° 00' 20" E., on the N-S center line of the NW1/4 of sec. 14. Point for the NW 1/16 sec. cor. of sec. 14, at the intersection with the E-W center line of the NW1/4 of sec. 14. Set a standard monument, 22 ins. in the ground, with brass cap mkd.
	T 12 N R 22 E NW 1/16 S 14 2015
	Set a steel fence post alongside and raise a collar of stone, 2 ft. diam.,

30
 Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
	around the standard monument.
2645.4	The point for the W 1/16 cor. of secs. 11 and 14. <hr style="width: 50%; margin-left: 0;"/> From the C-N 1/16 sec. cor. of sec. 14. N. 89° 45' 40" W., on the E-W center line of the NW1/4 of sec. 14.
1317.0	The NW 1/16 sec. cor. of sec. 25.
2634.0	The point for the N 1/16 sec. cor. of secs. 14 and 15. <hr style="width: 50%; margin-left: 0;"/>
	Section 23 <hr style="width: 50%; margin-left: auto; margin-right: auto;"/>
	From the 1/4 sec. cor. of secs. 23 and 26. N. 0° 10' 10" E., on the N-S center line of sec. 23.
1320.0	Point for the C-S 1/16 sec. cor. of sec. 23. Set a standard monument, 14 ins. in the ground, to bedrock, in a supporting collar of stone, 3 ft. diam., 1 ft. high, with brass cap mkd.
	T 12 N R 22 E C S 1/16 S 23 C 2014
	Set a steel fence post alongside the standard monument. The cor. is situated S, 10 ft. dist., from a cor. of fences extending E and W.
2640.0	Point for the C 1/4 sec. cor. of sec. 23, at the intersection with the E-W center line of sec. 23. Set a standard monument, 25 ins. in the ground, with brass cap mkd.

31
 Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
	T 12 N R 22 E C 1/4 S 23 2014 Set a steel fence post alongside and raise a collar of stone, 2 ft. diam., around the standard monument.
5275.5	The 1/4 sec. cor. of secs. 14 and 23. <hr/> From the 1/4 sec. cor. of secs. 23 and 24. S. 89° 53' 10" W., on the E-W center line of sec. 23.
2637.3	The C 1/4 sec. cor. of sec. 23
3958.7	Point for the C-W 1/16 sec. cor. of sec. 23. Set a standard monument, 25 ins. in the ground, with brass cap mkd.
	T 12 N R 22 E W 1/16 C ——— C S 23 2014 Set a steel fence post alongside and raise a collar of stone, 2 ft. diam., around the standard monument.
5280.1	The 1/4 sec. cor. of secs. 22 and 23. <hr/> From the S 1/16 sec. cor. of secs. 23 and 24. S. 89° 56' 50" W., on the E-W center line of the SE1/4 of sec. 23.
2638.6	The C-S 1/16 sec. cor. of sec. 23. <hr/> From the point for the W 1/16 sec. cor. of secs. 23 and 26.

32
 Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
1318.3	<p>N. 0° 08' 50" E., on the N-S center line of the SW1/4 of sec. 23.</p> <p>Point for the SW 1/16 sec. cor. of sec. 23, at the intersection with the E-W center line of the SW1/4 of sec. 23.</p> <p>Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E SW 1/16 S 23 2014</p> <p>Set a steel fence post alongside and raise a collar of stone, 2 1/2 ft. diam., around the standard monument.</p> <p>The cor. is situated S. 37° E., 7 ft. dist., from a cor. of fences extending N and E.</p>
2636.6	<p>The C-W 1/16 sec. cor. of sec. 23.</p> <hr/> <p>From the C-S 1/16 sec. cor. of sec. 23.</p> <p>S. 89° 57' 20" W., on the E-W center line of the SW1/4 of sec. 23.</p>
1321.0	<p>The SW 1/16 sec. cor. of sec. 23.</p>
2642.0	<p>The point for the S 1/16 cor. of secs. 22 and 23.</p> <hr/> <p style="text-align: center;">Section 24</p> <hr/> <p>From the 1/4 sec. cor. of secs. 24 and 25.</p> <p>N. 0° 09' 50" E., on the N-S center line of sec. 24.</p>
1312.1	<p>Point for the C-S 1/16 sec. cor. of sec. 24.</p> <p>Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p>

Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
2624.2	<p style="text-align: center;">T 12 N R 22 E C S 1/16 S 24 C 2014</p> <p>Set a steel fence post alongside and raise a collar of stone, 2 1/2 ft. diam., around the standard monument.</p> <p>The cor. is situated S. 19° W., 14 ft. dist., from a cor. of fences extending N and W.</p> <p>Point for the C 1/4 sec. cor. of sec. 24, at the intersection with the E-W center line of sec. 24.</p> <p>Set a standard monument, 24 ins. in the ground, with brass cap mkd.</p>
3935.6	<p style="text-align: center;">T 12 N R 22 E C 1/4 S 24 2014</p> <p>Set a steel fence post alongside and raise a collar of stone, 3 ft. diam., around the standard monument.</p> <p>The cor. is situated S. 29° W., 20 ft. dist., from a cor. of fences extending S and W.</p> <p>Point for the C-N 1/16 sec. cor. of sec. 24. Not monumented.</p>
5247.0	<p>The 1/4 sec. cor. of secs. 13 and 24.</p> <hr/> <p>From the 1/4 sec. cor. of sec. 24 only, on the E. bdy. of the Tp.</p> <p>N. 89° 27' 00" W., on the E-W center line of sec. 24.</p>
1504.1	<p>Point for the C-E 1/16 sec. cor. of sec. 24. Not monumented.</p>
2828.7	<p>The C 1/4 sec. cor. of sec. 24.</p>

34
 Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
4149.0	Point for the C-W 1/16 sec. cor. of sec. 24. Not monumented.
5469.3	The 1/4 sec. cor. of secs. 23 and 24. <hr/>
	From the point for the C-E 1/16 sec. cor. of sec. 24. N. 0° 02' 30" E., on the N-S center line of the NE1/4 of sec. 24.
1313.7	Point for the NE 1/16 sec. cor. of sec. 24, at the intersection with the E-W center line of the NE1/4 of sec. 25. Set a standard monument, 23 ins. in the ground, with brass cap mkd. <div style="text-align: center;">T 12 N R 22 E NE 1/16 S 24 2015</div>
	Set a steel fence post alongside the standard monument.
2627.3	The E 1/16 sec. cor. of secs. 13 and 24. <hr/>
	From the N 1/16 sec. cor. of sec. 24 only, on the E. bdy. of the Tp. N. 89° 32' 40" W., on the E-W center line of the NE1/4 of sec. 24.
1524.5	The NE 1/16 sec. cor. of sec. 24
2846.2	The point for the C-N 1/16 sec. cor. of sec. 24. <hr/>
	From the W 1/16 sec. cor. of secs. 24 and 25. N. 0° 08' 30" E., on the N-S center line of the SW1/4 of sec. 24.
1317.5	Point for the SW 1/16 sec. cor. of sec. 24, at the intersection with the E-W center line of the SW1/4 of sec. 24. Set a standard monument, 26 ins. in the ground, with brass cap mkd.

Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
	T 12 N R 22 E SW 1/16 S 24 2014
	Set a steel fence post alongside and raise a collar of stone, 1 1/2 ft. diam., around the standard monument.
	The cor. is situated S. 20° E., 11 1/2 ft. dist., from a cor. of fences extending E and S.
2635.0	The point for the C-W 1/16 sec. cor. of sec. 24.
	<hr/> From the C-S 1/16 sec. cor. of sec. 24. N. 89° 40' 50" W., on the E-W center line of the SW1/4 of sec. 24.
1319.9	The SW 1/16 sec. cor. of sec. 24.
2639.8	The S 1/16 cor. of secs. 23 and 24.
	<hr/> Section 25
	From the true point for the 1/4 sec. cor. of secs. 25 and 36. N. 0° 08' 00" E., on the N-S center line of sec. 25.
1320.4	Point for the C-S 1/16 sec. cor. of sec. 25.
	Set a standard monument, 24 ins. in the ground, with brass cap mkd.
	T 12 N R 22 E C S 1/16 S 25 C 2014

Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet

<p>2640.8</p>	<p>Set a steel fence post alongside and raise a collar of stone, 3 ft. diam., around the standard monument.</p> <p>The cor. is situated S. 35° E., 12 ft. dist., from a cor. of fences extending N and E.</p> <p>Point for the C 1/4 sec. cor. of sec. 25, at the intersection with the E-W center line of sec. 25.</p> <p>Set a standard monument, 25 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E C 1/4 S 25 2014</p>
<p>3958.2</p>	<p>Set a steel fence post alongside and raise a collar of stone, 2 ft. diam., around the standard monument.</p> <p>The cor. is situated E, 6 ft. dist., from a fence extending N and S.</p> <p>Point for the C-N 1/16 sec. cor. of sec. 25.</p> <p>Set a standard monument, 21 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T 12 N R 22 E C N 1/16 S 25 C 2014</p>
<p>5275.6</p>	<p>Set a steel fence post alongside and raise a collar of stone, 3 ft. diam., around the standard monument.</p> <p>The cor. is situated W, 3 ft. dist., from a cor. of fences extending S and W.</p> <p>The 1/4 sec. cor. of secs. 24 and 25.</p> <hr style="width: 50%; margin-left: 0;"/> <p>From the 1/4 sec. cor. of sec. 25 only, on the E. bdy. of the Tp.</p>

Subdivision of Sections 13, 14, 23, 24, and 25
Township 12 North, Range 22 East
Principal Meridian, Montana

Feet	
	N. 89° 58' 10" W., on the E-W center line of sec. 25.
2749.9	The C 1/4 sec. cor. of sec. 25
4072.2	Point for the C-W 1/16 sec. cor. of sec. 25. Not monumented.
5394.5	The 1/4 sec. cor. of secs. 25 and 26.
	From the S 1/16 sec. cor. of sec. 25 only, on the E. bdy. of the Tp.
	N. 89° 57' 10" W., on the E-W center line of the SE1/4 of sec. 25.
2726.8	The C-S 1/16 sec. cor. of sec. 25.
	From the point for the C-W 1/16 sec. cor. of sec. 25.
	N. 0° 11' 30" E., on the N-S center line of the NW1/4 of sec. 25.
1318.1	Point for the NW 1/16 sec. cor. of sec. 25, at the intersection with the E-W center line of the NW1/4 of sec. 25.
	Set a standard monument, 27 ins. in the ground, with brass cap mkd.
	T 12 N R 22 E NW 1/16 S 25 2014
	Set a steel fence post alongside and raise a collar of stone, 3 ft. diam., around the standard monument.
	The cor. is situated N. 55° W., 2 1/2 ft. dist., from a cor. of fences extending N and E.
2636.2	The W 1/16 sec. cor. of secs. 24 and 25.
	From the C-N 1/16 sec. cor. of sec. 25.
	N. 89° 56' 30" W., on the E-W center line of the NW1/4 of sec. 25.

38
 Subdivision of Sections 13, 14, 23, 24, and 25
 Township 12 North, Range 22 East
 Principal Meridian, Montana

Feet	
1320.9	The NW 1/16 sec. cor. of sec. 25.
2641.8	The point for the N 1/16 sec. cor. of secs. 25 and 26.
	<hr/> GENERAL DESCRIPTION <hr/>
	<p>The area surveyed is within the Little Snowy Mountains. Average elevation is 4700 ft. The area is timbered with pine in the higher elevations and contains several grassy parks. The lower elevations consist of the grass covered Durfee Hills transitioning to plains. Durfee creek flows from natural springs near the east boundary of the township in proximity to the line between secs. 13 and 24 and courses easterly. Primary access to the area is provided via Snowy Mountain Road and Upper Flatwillow Road, both of which are accessed from U.S. Hwy 87. Secondary access is only by way of graded private ranch roads which transition into two-track roads. Most of the survey corners for this survey can be reached by way of All-Terrain Vehicles with the rest accessible by foot. Roundup, MT is located approximately 30 miles to the southeast.</p> <hr/>
	<hr/> Field Assistants <hr/>
	Joshua F. Alexander.....Chief Cadastral Surveyor H. Marvin Montoya.....Cadastral Surveyor Thomas A. Trzinski.....Cadastral Surveyor Blaise J. Lodermeier.....Cadastral Surveyor

CERTIFICATE OF SURVEY

I, Andrew J. Varilek, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing the date of the 21st day of October, 2014, I have dependently resurveyed a portion of the east boundary and a portion of the subdivisional lines, and subdivided sections 13, 14, 23, 24, and 25, in Township 12 North, Range 22 East, of the Principal Meridian, in the State of Montana, which are represented in the foregoing field notes as having been executed by me and under my direction. Said survey has been made in strict conformity with said special instructions, the Manual of Surveying Instructions 2009, and in the specific manner described in the foregoing field notes.

July 21, 2015
(Date)

Andrew J. Varilek
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL BUREAU OF LAND MANAGEMENT Billings, Montana

The foregoing field notes of the dependent resurvey of a portion of the east boundary and a portion of the subdivisional lines, and the subdivision of sections 13, 14, 23, 24, and 25, in Township 12 North, Range 22 East of the Principal Meridian, in the State of Montana, executed by Andrew J. Varilek, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

July 21, 2015
(Date)

Joshua F. Alexander
(Chief Cadastral Surveyor, for Montana)